

IMIGY® LED Mini! Down Light 3*1W

1. Housing: Aluminum material with good heat conduction, original color or black color can be made.

2. Working Temperature: -10°C-40°C

3. Life time: 40,000 hours (brightness maintenance rate 70%)

4. Low heat, no UV or IR light radiation.

5. Weight: 180g

6. Package: White Box


7. This product works as a replacement of traditional downlight.

8. Notes: It can be widely used for hotel, restaurant, commercial & home lighting etc.

1) This product can not realize dimmer effect.

2) The thickness of ceiling material should be 5-20mm.

3) No sundries around, no cover on the downlight due to heat sinking concern.



LEDS	3	W	3.6	HOURS	40000	VDC	12-24	CUTOUT	Φ65
LED	Nichia								



COLOR	4200K	TEMP.	70RA	CRI	240
COLOR	3300K	TEMP.	75RA	CRI	200

IMIGY® LED Mini! Down Light 3*1W (with power supply)

1. Housing: Aluminum material with good heat conduction.

2. Matched with IMAGY specified external power supply.

3. Working Temperature: -10°C-40°C

4. Life time: 40,000 hours (brightness maintenance rate 70%)

5. Low heat, no UV or IR light radiation.

6. Package: White Box


7. This product works as a replacement of traditional down light.

8. Notes: It can be widely used for hotel, restaurant, commercial & residential lighting etc.



8. Notes: This product can not realize dimmer effect.

2) The thickness of ceiling material should be 5-20mm.

3) No sundries around, no cover on the Down Light due to heat sinking concern.



LEDS	3	W	4.5	HOURS	40000	VAC	110/220	CUTOUT	Φ65
LED	Nichia								

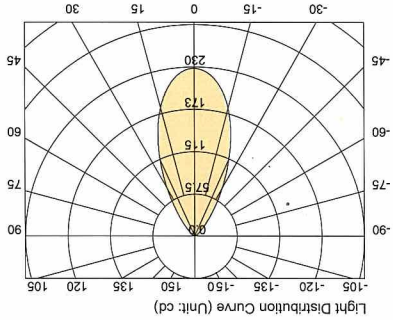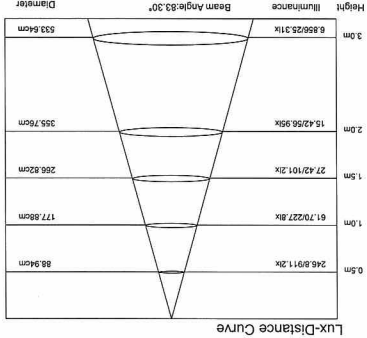

COLOR	4200K	TEMP.	70RA	CRI	240
COLOR	3300K	TEMP.	75RA	CRI	200